

The background of the entire page is a dynamic, high-speed scene of a car driving at night. The car is dark-colored, and its wheels are blurred, suggesting motion. The background is a mix of blue and purple hues, with light trails from city buildings and streetlights. The Evolux Tire logo is positioned at the top center, with 'EVOLUX' in a bold, black, sans-serif font and 'TIRE' in a smaller, black, sans-serif font below it. The 'X' in 'EVOLUX' is stylized with a blue and white graphic element.

EVOLUX
TIRE

PASSENGER CAR & LIGHT TRUCK TIRE CATALOG



na.evoluxxtire.com

CONTENTS

COMPANY INTRODUCTION.....03

PASSENGER CAR

CAPRICORN UHP.....11

CAPRICORN HP.....13

SUV & LIGHT TRUCK

CAPRICORN 4x4 HP.....15

ROTATOR H/T.....17

ROTATOR A/T.....19

 (3PMSF)

SAGITTA X/T.....21


 (3PMSF)

ROTATOR R/T.....25

 (3PMSF)

ROTATOR M/T.....29

REPLACEMENT MARKET TIRES
WARRANTY.....31

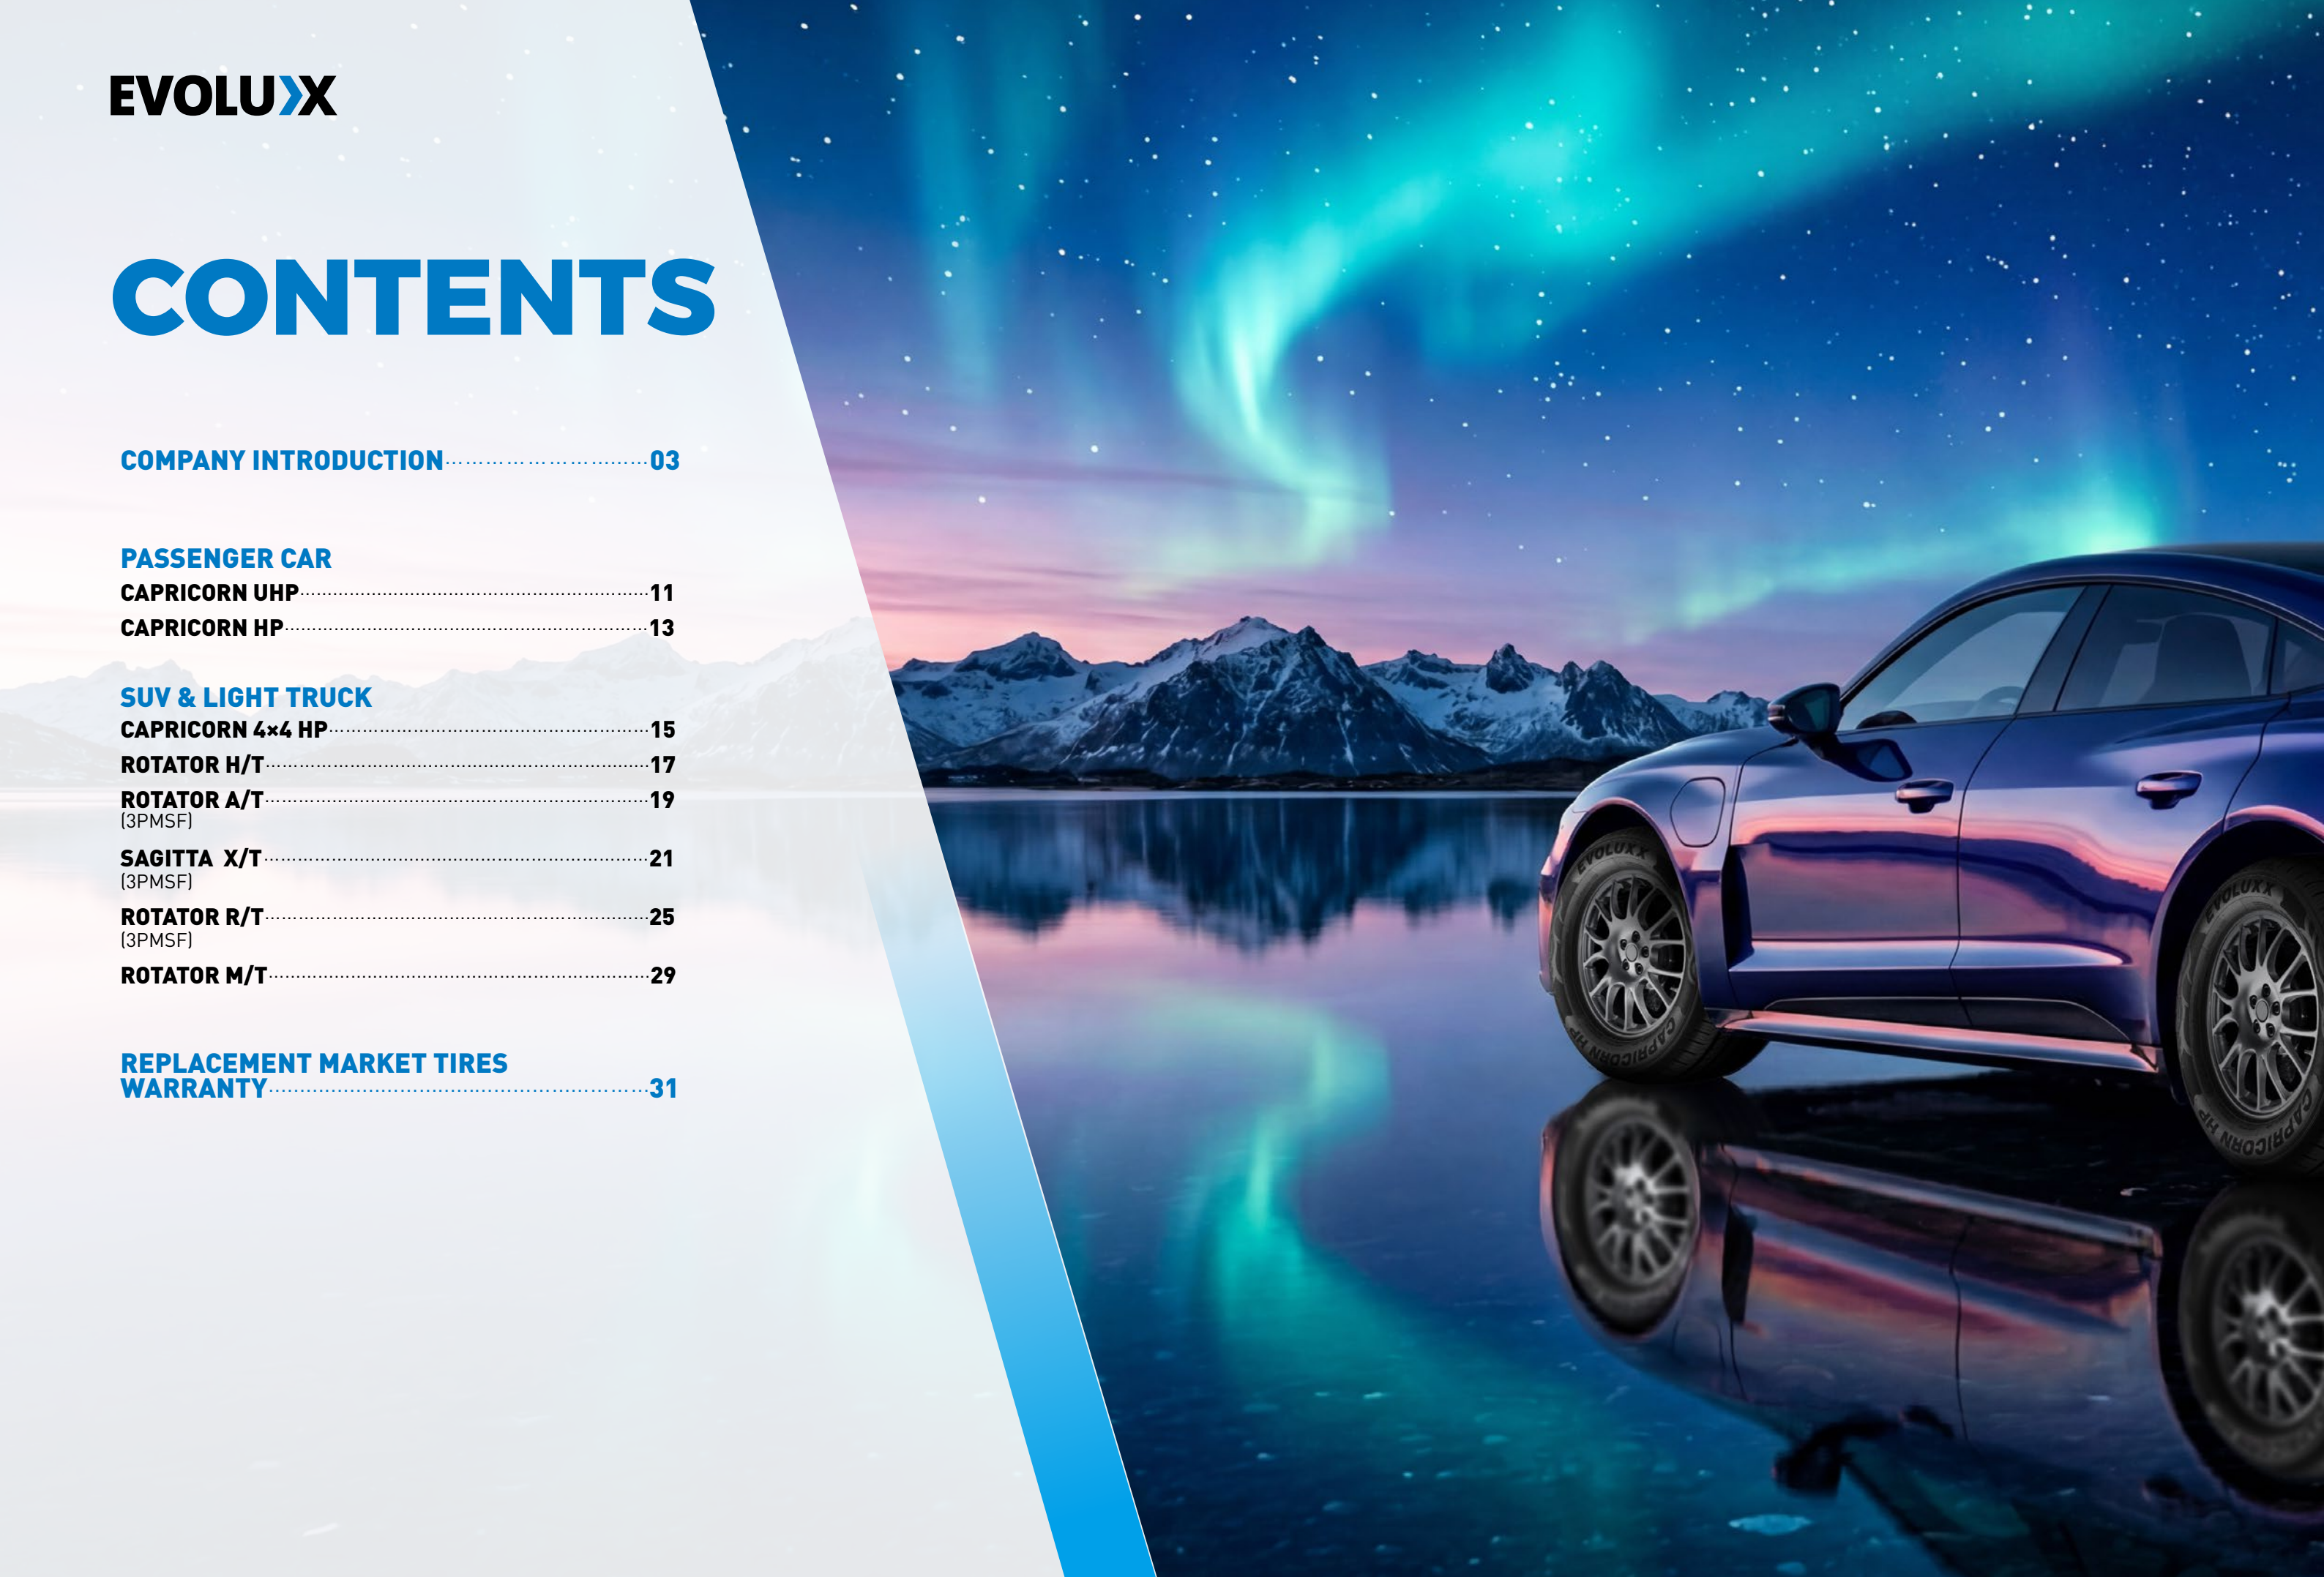

COMPANY INTRODUCTION

TIRE MANUFACTURER INTEGRATING TIRE DESIGN,
DEVELOPMENT, MANUFACTURING AND SALES

PRODUCT APPLICATION

Passenger & Light Truck Tires Commercial Tires

Products sold to over

173+

countries worldwide

OEM services provided to over

70+

automakers

OEM services for over

200+

production bases

Cumulative OE tires exceeding

300+

million units

SINCE

1975

Founded in 1975, Shandong Linglong Tyre Co., Ltd. has grown into one of the world's leading tire manufacturers, delivering innovative and high-performance tire solutions to customers across more than 170 countries. As a vertically integrated manufacturer, Linglong combines advanced research and development, intelligent manufacturing, global supply chain capabilities, and comprehensive customer support to meet the evolving needs of the automotive and commercial transportation industries.



GLOBAL LAYOUT



R&D Center in the United States

Open R&D Innovation System

3

Countries

8

R&D Centers

1500+

Authorized Patents

2000+

Technical Team

Linglong Tire's global manufacturing network is built on a strategic "Globalization + Regionalization + Localization" approach, enabling the company to efficiently serve customers across key markets worldwide. With multiple production facilities throughout China and international manufacturing hubs in Thailand and Serbia, Linglong delivers scalable production capacity, reliable supply chain performance, and localized market support to distributors, dealers, fleets, and OEM partners around the world.

R&D Center in Germany

Serbia

Linglong International Europe d.o.o. Zrenjanin

Linglong International Tyre(Thailand)Co.,Ltd



Production Bases Outside China

- Linglong International Tyre (Thailand) Co., Ltd.
- Linglong International Europe d.o.o. Zrenjanin
- Under continuous evaluation.



Production Bases in China

- Jilin Linglong Tyre Co., Ltd.
- Shandong Linglong Tyre Co., Ltd.
- Dezhou Linglong Tyre Co., Ltd.
- Hubei Linglong Tyre Co., Ltd.
- Guangxi Linglong Tyre Co., Ltd.

Find Your Best Tire Match

Use the guide below to compare our tire lineup and select the product best suited to your vehicle and intended application.



- ☒ Best match
- ☐ Secondary match

CAPRICORN UHP
Ultra High Performance


CAPRICORN HP
High Performance


CAPRICORN 4x4 HP SUV
SUV


ROTATOR H/T
Highway Terrain


Sports Car	☒	☐		
Luxury Performance Touring	☐	☒	☐	
Car & Minivan		☒	☐	
CUV & SUV		☐	☒	☒
Light Truck & Pickup			☐	☐
Light Commercial				☐

ROTATOR A/T
All-Terrain


SAGITTA X/T
Extreme All-Terrain


ROTATOR R/T
Rugged Terrain


ROTATOR M/T
Mud Terrain


Sports Car				
Luxury Performance Touring				
Car & Minivan				
CUV & SUV	☐	☐	☐	☐
Light Truck & Pickup	☒	☒	☒	☒
Light Commercial	☐	☐	☐	☐

FIND YOUR BEST TIRE MATCH

PASSENGER CAR SUV & LIGHT TRUCK

PASSENGER CAR

➤ CAPRICORN UHP	11
CAPRICORN HP	13

SUV & LIGHT TRUCK

➤ CAPRICORN 4x4 HP	15
ROTATOR H/T	17
ROTATOR A/T (3PMSF)	21
SAGITTA X/T (3PMSF)	23
ROTATOR R/T (3PMSF)	25
ROTATOR M/T	29

NEW

SAGITTA X/T

CAPRICORN UHP

Ultra High Performance Tire




Superb Handling Performance

- Reinforced outer shoulder blocks increase tread stiffness for more precise handling and confident cornering
- 3D sipes balance the tread block stiffness and improve handling performance



Excellent Dry and Wet Braking

- Four longitudinal grooves improve braking and wet road performance
- The next-generation tread compound is engineered to provide year-round performance with improved wet and dry braking capability

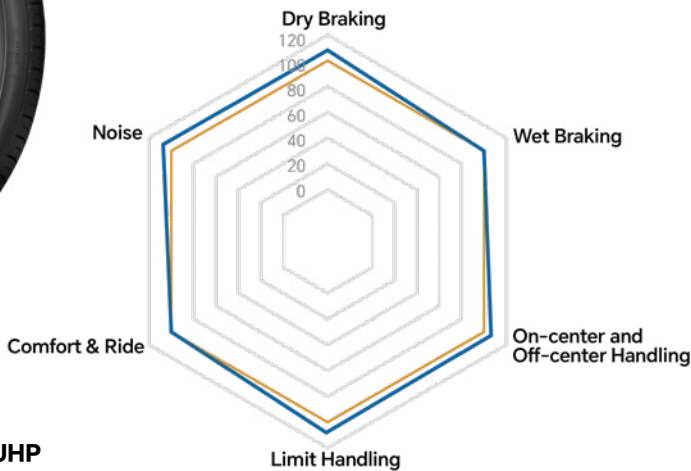

MADE IN THAILAND



H Brand
CAPRICORN UHP

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	195/45R16 XL		84	V	6 1/2J	500	1102	340	50
	205/50R16 XL		91	W	6 1/2J	615	1356	340	50
	205/55R16 XL		94	W	6 1/2J	670	1477	340	50
	215/55R16 XL		97	W	7J	730	1609	340	50
	225/50R16 XL		96	V	7J	710	1565	340	50
17	205/40R17 XL		84	W	7 1/2J	500	1102	340	50
	205/45R17 XL		88	W	7J	560	1235	340	50
	205/50R17 XL		93	W	6 1/2J	650	1433	340	50
	215/40R17 XL		87	W	7 1/2J	545	1201	340	50
	215/45R17 XL		91	W	7J	615	1356	340	50
	215/50R17 XL		95	W	7J	690	1521	340	50
	215/55R17 XL		98	W	7J	750	1653	340	50
	225/45R17 XL		94	W	7 1/2J	670	1477	340	50
	225/50R17 XL		98	W	7J	750	1653	340	50
	235/45R17 XL		97	W	8J	730	1609	340	50

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
17	245/40R17 XL		95	W	8 1/2J	690	1521	340	50
	245/45R17 XL		99	W	8J	775	1709	340	50
18	215/35R18 XL		84	W	7 1/2J	500	1102	340	50
	215/40R18 XL		89	Y	7 1/2J	580	1279	340	50
	225/40R18 XL		92	Y	8J	630	1389	340	50
	225/45R18 XL		95	W	7 1/2J	690	1521	340	50
	225/50R18		95	V	7J	690	1521	300	44
	235/40R18 XL		95	W	8 1/2J	690	1521	340	50
	235/45R18 XL		98	Y	8J	750	1653	340	50
	235/50R18 XL		101	W	7 1/2J	825	1819	340	50
	245/40R18 XL		97	W	8 1/2J	730	1609	340	50
	245/45R18 XL		100	W	8J	800	1764	340	50
	255/45R18 XL		103	W	8 1/2J	875	1929	340	50
	275/25R28 XL		99	W	10J	775	1709	340	50
	275/40R18 XL		103	Y	9 1/2J	875	1929	340	50
19	225/35R19 XL		88	W	8J	560	1235	340	50
	235/35R19 XL		91	W	8 1/2J	615	1356	340	50
	235/40R19 XL		96	Y	8 1/2J	710	1565	340	50
	235/55R19 XL		105	Y	7 1/2J	925	2039	340	50
	245/40R19 XL		98	Y	8 1/2J	750	1653	340	50
	245/45R19 XL		102	W	8J	850	1874	340	50
	275/30R19 XL		96	W	9 1/2J	710	1565	340	50
	275/35R19 XL		100	Y	9 1/2J	800	1764	340	50
20	275/40R19 XL		105	Y	9 1/2J	925	2039	340	50
	225/35R20 XL		90	W	8J	600	1323	340	50
	235/45R20 XL		100	W	8J	800	1764	340	50
	245/35R20 XL		95	W	8 1/2J	690	1521	340	50
	245/40R20 XL		99	Y	8 1/2J	775	1709	340	50
	245/45R20 XL		103	Y	8J	875	1929	340	50
	245/50R20		102	V	7 1/2J	850	1874	300	44
	255/35R20 XL		97	W	9J	730	1609	340	50
	255/45R20 XL		105	Y	8 1/2J	925	2039	340	50
	275/30R20 XL		97	Y	9 1/2J	730	1609	340	50
	275/35R20 XL		102	Y	9 1/2J	850	1874	340	50
	275/40R20 XL		106	Y	9 1/2J	950	2094	340	50
	275/45R20 XL		110	V	9J	1060	2337	340	50
	275/55R20 XL		117	W	8 1/2J	1285	2833	340	50
22	235/30R22 XL		90	W	8 1/2J	600	1323	340	50
	245/30R22 XL		92	W	8 1/2J	630	1389	340	50
	255/30R22 XL		95	W	9J	690	1521	340	50
	265/35R22 XL		102	W	9 1/2J	850	1874	340	50
	265/40R22 XL		106	V	9 1/2J	950	2094	340	50
	285/35R22 XL		106	W	10J	950	2094	340	50
	285/40R22 XL		110	V	10J	1060	2337	340	50
	285/45R22 XL		114	W	9 1/2J	1180	2601	340	50
	295/25R22 XL		97	W	10 1/2J	730	1609	340	50
	305/40R22 XL		114	V	11J	1180	2601	340	50
	305/45R22 XL		118	V	10J	1320	2910	340	50

EVOLVE WITHOUT LIMITS

PASSENGER CAR

CAPRICORN HP

High Performance Tire



MADE IN THAILAND




Impressive Driving Comfort

- Tread blocks with high density sipes provide driving comfort and all season performance



Outstanding Handling Performance

- Five rib design is engineered to increase contact area for improved steering response and handling
- The optimized multi-notch tread design rapidly evacuates water through four wide circumferential grooves, improving wet handling, traction and braking performance

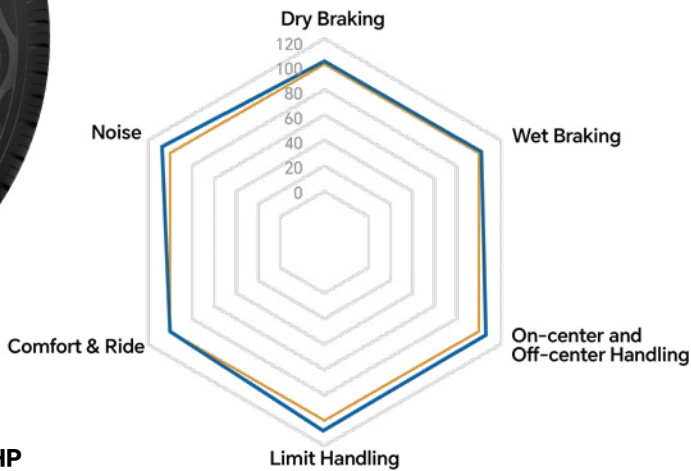

ROAD M+S

H Brand
CAPRICORN HP

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
14	185/60R14		82	H	51/2J	475	1047	300	44
	185/65R14		86	H	51/2J	530	1168	300	44
	195/70R14		91	H	6J	615	1356	300	44
15	185/60R15		84	H	51/2J	500	1102	300	44
	185/65R15		88	H	51/2J	560	1235	300	44
	195/50R15 XL		86	V	6J	530	1168	340	50
	195/55R15		85	V	6J	515	1135	300	44
	195/60R15		88	H	6J	560	1235	300	44

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	195/65R15		91	H	6J	615	1356	300	44
	205/65R15		94	H	6J	670	1477	300	44
	215/60R15		94	H	61/2J	670	1477	300	44
	215/65R15 XL		100	H	61/2J	800	1764	340	50
	255/70R15		108	S	71/2J	1000	2205	300	44
16	205/55R16		91	H	61/2J	615	1356	300	44
	205/60R16		92	H	6J	630	1389	300	44
	205/65R16		95	H	6J	690	1521	300	44
	215/60R16		95	H	61/2J	690	1521	300	44
	215/65R16		98	H	61/2J	750	1653	300	44
	225/55R16		95	V	7J	690	1521	300	44
	225/60R16		98	H	61/2J	750	1653	300	44
	225/65R16		100	H	61/2J	800	1764	300	44
	225/70R16 XL		107	H	61/2J	975	2149	340	50
	235/60R16		100	H	7J	800	1764	300	44
17	235/65R16		103	H	7J	875	1929	300	44
	215/55R17		94	V	7J	670	1477	300	44
	215/60R17		96	H	61/2J	710	1565	300	44
	215/65R17		99	H	61/2J	775	1709	300	44
	225/55R17		97	H	7J	730	1609	300	44
	225/60R17		99	H	61/2J	775	1709	300	44
	225/65R17		102	H	61/2J	850	1874	300	44
	235/55R17		99	H	71/2J	775	1709	300	44
20	235/60R17		102	H	7J	850	1874	300	44
	235/65R17		104	H	7J	900	1984	300	44
	225/35R20 XL		90	W	8J	600	1323	340	50
	275/55R20 XL		117	W	8 1/2J	1285	2833	340	50

CAPRICORN 4×4 HP

SUV Tire



MADE IN THAILAND




Excellent All Season Traction & Braking Performance

- A high-density siping pattern maximizes biting edges across the tread, delivering improved snow traction, braking, and steering control in winter conditions
- Engineered with open shoulder grooves and stepped tread edges to maximize water and slush evacuation for enhanced traction and steering precision
- Five rib design increases contact patch for better dry braking performance



Outstanding Handling Performance

- A reinforced apex compound and optimized apex height increase sidewall stability, providing precise steering and enhanced handling performance
- Large shoulder blocks and continuous central rib help improve driving experience and stability

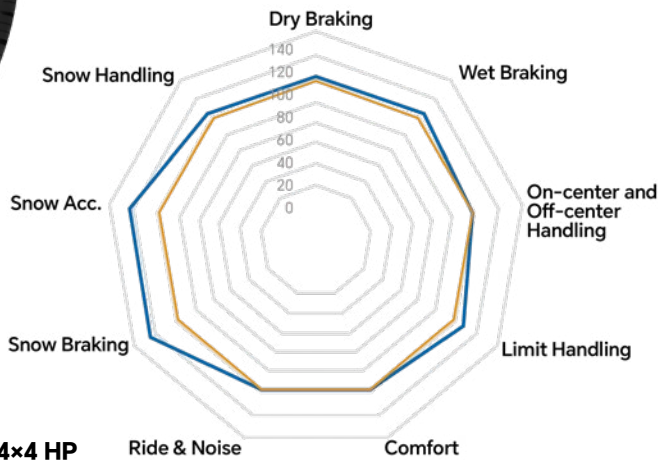

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	205/70R15		96	H	6J	710	1565	300	44
	235/70R15		103	H	7J	875	1929	300	44
16	205/70R16		97	V	6J	730	1609	300	44
	215/65R16 XL		102	H	6 1/2J	850	1874	340	50
	215/70R16		100	H	6 1/2J	800	1764	300	44
	225/60R16		98	H	6 1/2J	750	1653	300	44
	225/75R16		104	H	6J	900	1984	300	44

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	235/70R16		106	H	7J	950	2094	300	44
	245/70R16 XL		111	H	7J	1090	2403	340	50
	265/70R16		112	H	8J	1120	2469	300	44
	275/70R16		114	H	8J	1180	2601	300	44
17	215/60R17		96	H	6 1/2J	710	1565	300	44
	225/55R17 XL		101	V	7J	825	1819	340	50
	225/60R17		99	H	6 1/2J	775	1709	300	44
	225/65R17		102	H	6 1/2J	850	1874	300	44
	235/55R17 XL		103	V	7 1/2J	875	1929	340	50
	235/60R17 XL		106	V	7J	950	2094	340	50
	235/65R17 XL		108	V	7J	1000	2205	340	50
	235/70R17 XL		109	T	7J	1030	2271	340	50
	245/65R17 XL		111	H	7J	1090	2403	340	50
	255/60R17		106	H	7 1/2J	950	2094	300	44
	255/65R17		110	H	7 1/2J	1060	2337	300	44
	255/70R17		112	T	7 1/2J	1120	2469	300	44
	265/65R17		112	H	8J	1120	2469	300	44
	275/55R17		109	V	8 1/2J	1030	2271	300	44
18	225/60R18		100	H	6 1/2J	800	1764	300	44
	235/55R18 XL		104	V	7 1/2J	900	1984	340	50
	235/60R18 XL		107	V	7J	975	2149	340	50
	235/65R18		106	H	7J	950	2094	300	44
	245/60R18		105	V	7J	925	2039	300	44
	255/55R18 XL		109	V	8J	1030	2271	340	50
	255/60R18 XL		112	V	7 1/2J	1120	2469	340	50
	255/65R18		111	H	7 1/2J	1090	2403	300	44
	255/70R18		113	T	7 1/2J	1150	2535	300	44
	265/60R18		110	H	8J	1060	2337	300	44
	265/65R18		114	H	8J	1180	2601	300	44
	265/70R18		116	T	8J	1250	2756	300	44
	275/60R18		113	H	8J	1150	2535	300	44
	275/65R18		116	H	8J	1250	2756	300	44
19	245/55R19		103	V	7 1/2J	875	1929	300	44
	255/50R19 XL		107	W	8J	975	2149	340	50
	255/55R19 XL		111	V	8J	1090	2403	340	50
	255/60R19		109	H	7 1/2J	1030	2271	300	44
20	255/50R20 XL		109	V	8J	1030	2271	340	50
	275/60R20		115	T	8J	1215	2679	300	44

ROTATOR H/T

Highway Terrain Tire



Balanced Dry, Wet, and Snow Performance

- Wide circumferential groove design and optimal void-to-fill ratio balance wet and wear performance
- High-density linear and zigzag siping design improves handling and reduces irregular wear
- The new generation of modified SSBR tread formula significantly improves the fuel economy and wet grip of the tire, and greatly improves the driving safety in rainy conditions




Quiet and Comfortable Ride

- Multiple variable pitch design optimizes pitch ratio and alignment to reduce noise



MADE IN THAILAND

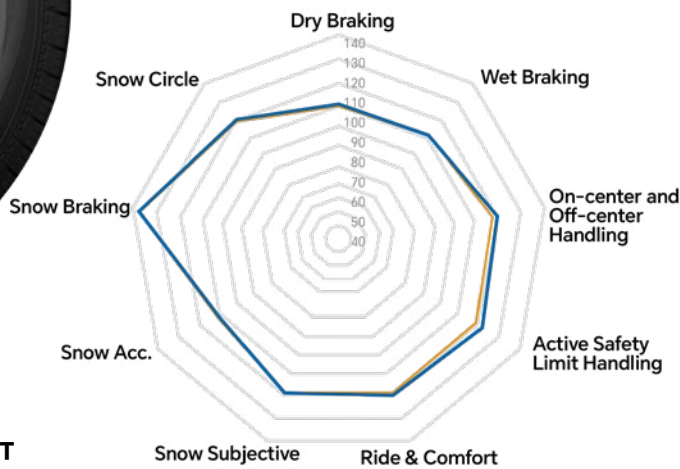

H Brand
ROTATOR H/T

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	235/75R15 XL		109	T	6 1/2J	1030	2271	340	50
	31X10.50R15LT	6PR	109	R	8 1/2J	1030	2270	350	50
16	225/70R16		103	T	6 1/2J	875	1929	300	44
	245/75R16		111	T	7J	1090	2403	300	44

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	255/70R16		111	T	7 1/2J	1090	2403	300	44
	265/75R16		116	T	7 1/2J	1250	2756	300	44
	LT215/85R16	10PR	115/112	S	6J	D 1120 S 1215	D 2470 S 2680	550	80
	LT225/75R16	10PR	115/112	S	6J	D 1120 S 1215	D 2470 S 2680	550	80
	LT235/85R16	10PR	120/116	R	6 1/2J	D 1260 S 1380	D 2778 S 3042	550	80
	LT245/75R16	10PR	120/116	R	7J	D 1260 S 1380	D 2778 S 3042	550	80
	LT265/75R16	10PR	123/120	R	7 1/2J	D 1400 S 1550	D 3085 S 3415	550	80
17	235/65R17		104	T	7J	900	1984	300	44
	245/70R17		110	T	7J	1060	2337	300	44
	265/65R17		112	T	8J	1120	2469	300	44
	265/70R17		115	T	8J	1215	2679	300	44
	275/65R17		115	S	8J	1215	2679	300	44
	285/65R17		116	S	8 1/2J	1250	2756	300	44
	LT235/80R17	10PR	120/117	R	6 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT245/75R17	10PR	121/118	R	7J	D 1320 S 1450	D 2910 S 3195	550	80
	LT265/70R17	10PR	121/118	R	8J	D 1320 S 1450	D 2910 S 3195	550	80
18	LT265/70R18	10PR	124/121	R	8J	D 1450 S 1600	D 3195 S 3525	550	80
	LT275/65R18	10PR	123/120	S	8J	D 1285 S 1550	D 2835 S 3415	550	80
	LT275/70R18	10PR	125/122	S	8J	D 1400 S 1650	D 3085 S 3640	550	80
20	265/50R20 XL		111	H	8 1/2J	1090	2403	340	50
	275/55R20 XL		117	T	8 1/2J	1285	2833	340	50




Extra Sidewall Protection Against Cuts, Impacts, and Punctures

- Chamfered tread block edges enhance block stability, minimizing irregular wear for longer-lasting performance
- The extended shoulder buttress design improves traction and control by increasing sidewall grip on soft ground and challenging off-road surfaces
- An advanced self-reinforcing tread compound with high-strength reinforcing materials delivers exceptional tear resistance, enhancing durability and long-lasting performance in demanding off-road conditions



Perfect Grip on Snow Surfaces

- High-density sipes offer excellent handling and snow/wet traction
- Engineered with advanced polymers and nano-enhanced compounds to retain flexibility in cold temperatures while maximizing traction, braking and control on snow and ice covered roads

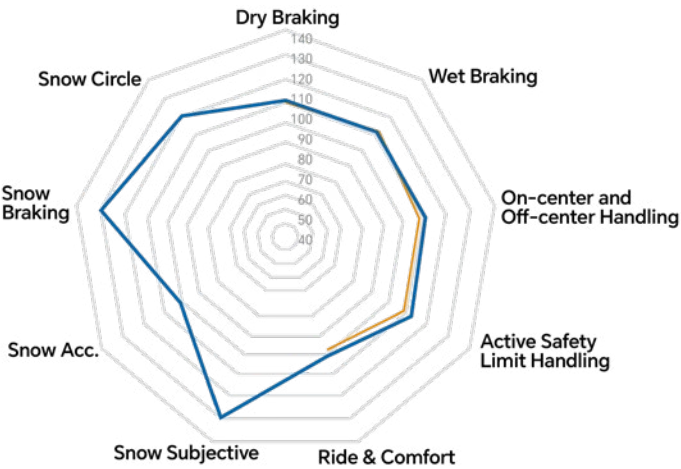

H Brand
ROTATOR A/T

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	235/75R15 XL OWL		109	T	6 1/2J	1030	2271	340	50
	265/70R15 OWL		112	T	8J	1120	2469	300	44
	LT235/75R15 OWL	6PR	104/101	R	6 1/2J	D 825 S 900	D 1820 S 1985	350	50
	30X9.50R15LT OWL	6PR	104	S	7 1/2J	900	1985	350	50
	31X10.50R15LT OWL	6PR	109	R	8 1/2J	1030	2270	350	50

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	235/70R16 OWL		106	T	7J	950	2094	300	44
	245/70R16 XL OWL		111	T	7J	1090	2403	340	50
	245/75R16 OWL		111	T	7J	1090	2403	300	44
	255/70R16 OWL		111	S	7 1/2J	1090	2403	300	44
	265/70R16 OWL		112	T	8J	1120	2469	300	44
	265/75R16 OWL		116	T	7 1/2J	1250	2756	300	44
	LT215/85R16	10PR	115/112	Q	6J	D 1120 S 1215	D 2470 S 2680	550	80
	LT225/75R16 OWL	10PR	115/112	Q	6J	D 1120 S 1215	D 2470 S 2680	550	80
	LT235/85R16 OWL	10PR	120/116	S	6 1/2J	D 1260 S 1380	D 2778 S 3042	550	80
	LT245/75R16 OWL	10PR	120/116	Q	7J	D 1260 S 1380	D 2778 S 3042	550	80
17	LT265/75R16 OWL	10PR	123/120	R	7 1/2J	D 1400 S 1550	D 3085 S 3415	550	80
	LT285/75R16 OWL	10PR	126/123	R	8J	D 1550 S 1700	D 3415 S 3750	550	80
	LT305/70R16 OWL	10PR	124/121	R	9J	D 1450 S 1600	D 3195 S 3525	450	65
	245/65R17 XL OWL		111	T	7J	1090	2403	340	50
	245/70R17 OWL		110	S	7J	1060	2337	300	44
	265/65R17		112	T	8J	1120	2469	300	44
	265/70R17 OWL		115	T	8J	1215	2679	300	44
	285/70R17 OWL		116	T	8 1/2J	1250	2756	300	44
	LT235/80R17 OWL	10PR	120/117	R	6 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT245/75R17 OWL	10PR	121/118	R	7J	D 1320 S 1450	D 2910 S 3195	550	80
18	LT265/70R17 OWL	10PR	121/118	R	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT285/70R17 OWL	8PR	121/118	S	8 1/2J	D 1320 S 1450	D 2910 S 3195	450	65
	LT285/70R17 OWL	10PR	121/118	S	8 1/2J	D 1320 S 1450	D 2910 S 3195	450	65
	LT305/70R17 OWL	8PR	119/116	R	9J	D 1250 S 1360	D 2755 S 3000	350	50
	255/70R18 OWL		113	S	7 1/2J	1150	2535	300	44
	265/70R18 OWL		116	T	8J	1250	2756	300	44
20	275/65R18 OWL		116	T	8J	1250	2756	300	44
	LT265/65R18 OWL	10PR	122/119	Q	8J	D 1360 S 1500	D 3000 S 3305	550	80
	LT265/70R18 OWL	10PR	124/121	S	8J	D 1450 S 1600	D 3195 S 3525	550	80
	LT275/65R18 OWL	10PR	123/120	S	8J	D 1400 S 1550	D 3085 S 3415	550	80
	LT275/70R18 OWL	10PR	125/122	S	8J	D 1500 S 1650	D 3305 S 3640	550	80
	LT305/60R18 OWL	10PR	121/118	R	9J	D 1320 S 1450	D 2910 S 3195	450	65
	275/55R20 OWL		113	S	8 1/2J	1150	2535	300	44
20	275/60R20 OWL		115	T	8J	1215	2679	300	44
	35X12.50R20LT OWL	10PR	121	Q	10J	1450	3195	450	65
	LT275/55R20 OWL	10PR	120/117	Q	8 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT275/60R20 OWL	10PR	123/120	Q	8J	D 1400 S 1550	D 3085 S 3415	550	80
	LT275/65R20 OWL	10PR	126/123	S	8J	D 1550 S 1700	D 3415 S 3750	550	80
	LT285/55R20	10PR	122/119	S	9J	D 1360 S 1500	D 3000 S 3305	550	80

SAGITTA X/T

Extreme All-Terrain Tire

Reinforced Protective Structure Provides Excellent Strength and Durability

- Wide lateral grooves with stone ejectors resist stone drilling
- Specially developed tread compound improves the resistance against cuts, chips and punctures in tough terrain
- Engineered with an integrated rim protector to help shield wheels from curb impacts and everyday road hazards

Perfect Grip on Snowy Surfaces

- Interlocked tread blocks with advanced compound and zigzag siping design bring excellent grip in wet and snowy road conditions

Outstanding Off-Road Traction

- The aggressive 3D sidewall design delivers extra sidewall protection in tough terrain especially with gravels and rocks, thus increases the adaptability on different surfaces

TECHNICAL DATA

16-22

Rim Diameter

265-345

Section Width

55-80


Cross Section

Q-T


Speed Symbol



TEST RESULT

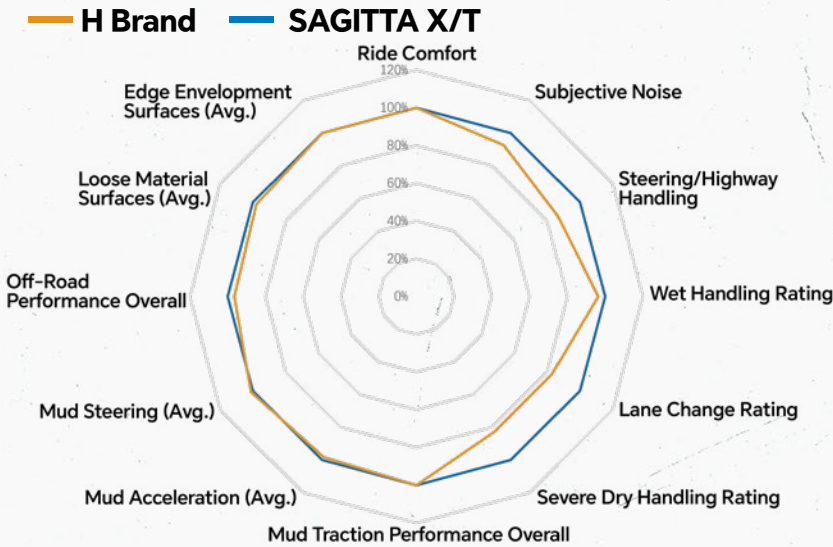

PERFORMANCE RATING

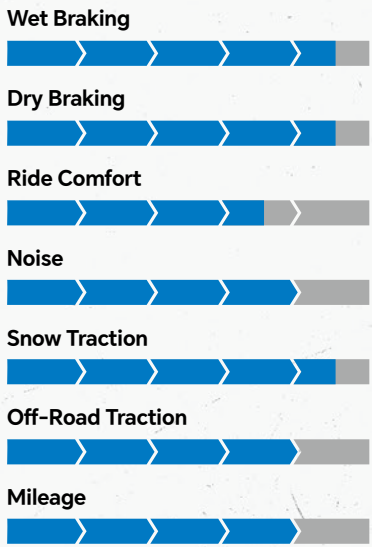

SAGITTA X/T

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	265/75R16		116	T	7 1/2J	1250	2756	300	44
	LT245/75R16	10PR	120/116	Q	7J	S 1380 D 1260	S 3042 D 2778	550	80
	LT265/75R16	10PR	123/120	Q	7 1/2J	S 1550 D 1400	S 3415 D 3085	550	80
	LT285/75R16	10PR	126/123	Q	8J	S 1700 D 1550	D 3750 D 3415	550	80
17	265/70R17		115	T	8J	1215	2679	300	44
	LT235/80R17	10PR	120/117	Q	6 1/2J	S 1400 D 1285	S 3085 D 2385	550	80
	LT245/70R17	10PR	119/116	S	7J	S 1360 D 1250	S 3000 D 2755	550	80
	LT245/75R17	10PR	121/118	Q	7J	S 1450 D 1320	S 3195 D 2910	550	80
	LT265/70R17	10PR	123/120	Q	8J	S 1550 D 1400	S 3415 D 3085	550	80
	LT285/70R17	8PR	122/119	Q	8 1/2J	S 1500 D 1360	S 3305 D 3000	450	65
	35X12.50R17LT	10PR	125	R	10J	1650	3640	450	65
18	275/65R18XL		116	T	8J	1250	2756	340	50
	LT265/70R18	10PR	124/121	Q	8J	S 1600 D 1450	S 3525 D 3195	550	80
	LT275/65R18	10PR	123/120	Q	8J	S 1550 D 1400	S 3415 D 3085	550	80
	LT275/70R18	10PR	125/122	Q	8J	S 1650 D 1500	S 3640 D 3305	550	80
	LT285/65R18	10PR	125/122	Q	8 1/2J	S 1650 D 1500	S 3640 D 3305	550	80
	33X12.50R18LT	12PR	122	R	10J	1500	3305	550	80
	35X12.50R18LT	10PR	123	R	10J	1550	3415	450	65

SAGITTA X/T

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
20	275/55R20XL		117	T	8 1/2J	1285	2833	340	50
	275/60R20		115	R	8J	1215	2679	300	44
	LT265/60R20	10PR	121/118	Q	8J	S 1450 D 1320	S 3195 D 2910	550	80
	LT275/55R20	10PR	120/117	S	8 1/2J	S 1400 D 1285	S 3085 D 2385	550	80
	LT275/60R20	10PR	123/120	Q	8J	S 1550 D 1400	S 3415 D 3085	550	80
	LT275/65R20	10PR	126/123	Q	8J	S 1700 D 1550	S 3750 D 3415	550	80
	LT285/55R20	10PR	122/119	S	9J	S 1500 D 1360	S 3305 D 3000	550	80
22	33X12.50R20LT	12PR	119	R	10J	1360	3000	550	80
	35X12.50R20LT	12PR	125	Q	10J	1650	3640	550	80
	33X12.50R22LT	12PR	114	R	10 1/2J	1180	2600	550	80
22	35X12.50R22LT	12PR	121	R	10J	1450	3195	550	80

EVOLVE WITHOUT LIMITS

SUV & LIGHT TRUCK



ROTATOR R/T

Rugged Terrain Tire




Outstanding Off-Road Traction

- Staggered angular blocks and ledges between lugs capable of removing sticky clods enhance off-road grip on muddy and sandy surfaces
- Wide lateral zigzag grooves optimize traction by increasing biting edges and promoting effective self-cleaning, ensuring reliable off-road performance throughout the tire's service life



Durable Construction

- High-strength three-ply carcass design along with sidewall adopting E-L Max patented technology provides impact and puncture resistance
- High-strength reinforcing cords strengthen the sidewall structure, improving puncture resistance and durability in demanding off-road environments

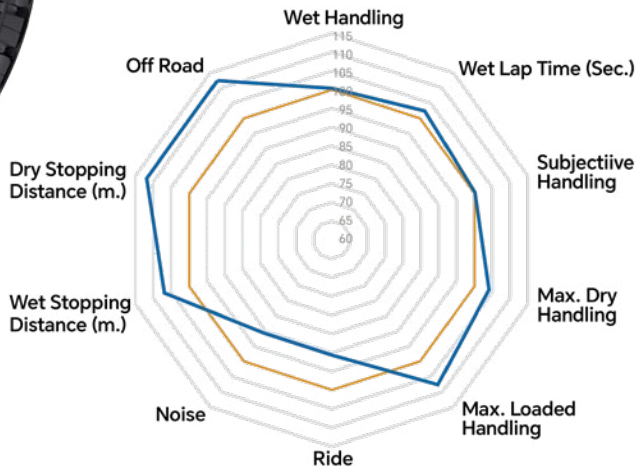

H Brand
ROTATOR R/T

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	31X10.50R15LT	6PR	109	Q	81/2J	1030	2270	350	51
16	LT235/85R16	12PR	123/120	Q	61/2J	D 1400 S 1550	D 3085 S 3415	650	94
	LT245/75R16	10PR	120/116	Q	7J	D 1250 S 1400	D 2755 S 3085	550	80
	LT265/75R16	10PR	123/120	Q	71/2J	D 1400 S 1550	D 3085 S 3415	550	80

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	LT285/75R16	10PR	126/123	Q	8J	D 1550 S 1700	D 3415 S 3750	550	80
	LT305/70R16	12PR	128/125	Q	9J	D 1650 S 1800	D 3640 S 3970	450	65
	LT315/75R16	10PR	127/124	Q	81/2J	D 1600 S 1750	D 3525 S 3860	450	65
17	33X12.50R17LT	12PR	121	Q	10J	1450	3195	550	80
	35X12.50R17LT	12PR	121	Q	10J	1450	3195	550	80
	37X12.50R17LT	12PR	121	Q	10J	1450	3195	550	80
	LT235/80R17	10PR	120/117	Q	61/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT245/70R17	10PR	119/116	Q	7J	D 1250 S 1360	D 2755 S 3000	550	80
	LT255/80R17	10PR	121/118	Q	7J	D1320 S1450	D 2910 S 3195	550	80
	LT265/70R17	10PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT285/70R17	10PR	121/118	Q	81/2J	D1320 S1450	D 2910 S 3195	550	80
	LT285/75R17	10PR	121/118	Q	8J	D1320 S1450	D 2910 S 3195	550	80
	LT295/70R17	10PR	121/118	Q	81/2J	D 1320 S 1450	D 2910 S 3195	550	80
	LT305/70R17	10PR	121/118	Q	9J	D 1320 S 1450	D 2910 S 3195	450	65
	LT315/70R17	12PR	121/118	Q	91/2J	D 1320 S 1450	D 2910 S 3195	550	80
18	33X12.50R18LT	12PR	122	Q	10J	1500	3305	550	80
	35X12.50R18LT	12PR	128	Q	10J	1800	3970	550	80
	37X12.50R18LT	12PR	128	Q	10J	1800	3970	550	80
	37X13.50R18LT	12PR	128	Q	11J	1800	3970	550	80
	LT275/65R18	10PR	123/120	Q	8J	D 1400 S 1550	D 3085 S 3415	550	80
	LT275/70R18	10PR	125/122	Q	8J	D 1500 S 1650	D 3305 S 3640	550	80
	LT285/60R18	10PR	122/119	Q	81/2J	D 1360 S 1500	D 3000 S 3305	550	80
	LT285/65R18	10PR	125/122	Q	81/2J	D 1500 S 1650	D 3305 S 3640	550	80

ROTATOR R/T

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
18	LT285/75R18	10PR	129/126	Q	8J	D 1700 S 1850	D 3750 S 4080	550	80
	LT295/70R18	10PR	129/126	Q	81/2J	D 1700 S 1850	D 3750 S 4080	550	80
	LT325/65R18	10PR	127/124	Q	91/2J	D 1600 S 1750	D 3525 S 3860	450	65
20	33X12.50R20LT	12PR	119	Q	10J	1360	3000	550	80
	35X11.50R20LT	10PR	124	Q	9J	1600	3525	550	80
	35X12.50R20LT	12PR	125	Q	10J	1650	3640	550	80
	35X13.50R20LT	12PR	126	Q	11J	1700	3750	550	80
	37X12.50R20LT	12PR	128	Q	10J	1800	3970	550	80
	37X13.50R20LT	12PR	128	Q	11J	1800	3970	550	80
	38X13.50R20LT	10PR	128	Q	11J	1800	3970	450	65
	LT265/60R20	10PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT275/55R20	12PR	122/119	Q	81/2J	D 1360 S 1500	D 3000 S 3305	650	95
	LT275/60R20	10PR	123/120	Q	8J	D 1400 S 1550	D 3085 S 3415	550	80
	LT275/65R20	12PR	128/125	R	8J	D 1650 S 1800	D 3640 S 3970	650	95
	LT285/55R20	12PR	124/121	S	9J	D 1450 S 1600	D 3195 S 3525	650	95
	LT285/60R20	10PR	125/122	Q	81/2J	D 1500 S 1650	D 3305 S 3640	550	80
	LT285/65R20	10PR	127/124	Q	81/2J	D 1600 S 1750	D 3525 S 3860	550	80
	LT295/55R20	10PR	123/120	Q	91/2J	D 1400 S 1550	D 3085 S 3415	550	80
	LT295/60R20	10PR	126/123	Q	81/2J	D 1550 S 1700	D 3415 S 3750	550	80
	LT295/65R20	10PR	129/126	Q	81/2J	D 1700 S 1850	D 3750 S 4080	550	80
	LT305/55R20	12PR	125/122	S	91/2J	D 1500 S 1650	D 3305 S 3640	550	80

ROTATOR R/T

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
20	LT315/60R20	10PR	125/122	Q	91/2J	D 1500 S 1650	D 3305 S 3640	450	65
	LT325/60R20	10PR	126/123	Q	91/2J	D 1550 S 1700	D 3415 S 3750	450	65
22	33X12.50R22LT	12PR	114	Q	10J	1180	2600	550	80
	35X12.50R22LT	12PR	121	Q	10J	1450	3195	550	80
	37X12.50R22LT	12PR	127	Q	10J	1750	3860	550	80
	37X13.50R22LT	12PR	128	Q	11J	1800	3970	550	80
	38X13.50R22LT	12PR	128	Q	11J	1800	3970	550	80
	38X15.50R22LT	10PR	128	Q	121/2J	1800	3970	450	65
	LT295/50R22	10PR	122/119	Q	91/2J	D 1360 S 1500	D 3000 S 3305	550	80
	LT295/55R22	10PR	125/122	Q	91/2J	D 1500 S 1650	D 3305 S 3640	550	80
	LT325/50R22	12PR	127	Q	10J	1750	3860	550	80
24	33X12.50R24LT	12PR	106	Q	111/2J	950	2095	550	80
	33X13.50R24LT	12PR	110	Q	11J	1060	2335	550	80
	35X12.50R24LT	12PR	116	Q	101/2J	1250	2755	550	80
	35X13.50R24LT	12PR	116	Q	12J	1250	2755	550	80
	37X13.50R24LT	12PR	124	Q	11J	1600	3525	550	80
	38X15.50R24LT	12PR	128	Q	121/2J	1800	3970	550	80
26	35X13.50R26LT	12PR	111	Q	11J	1090	2405	550	80
	37X13.50R26LT	12PR	117	Q	11J	1285	2835	450	65

EVOLVE WITHOUT LIMITS

SUV & LIGHT TRUCK



ROTATOR M/T


Mud-Terrain Tire

 Exceptional Cut and Chip Resistance for Rugged Mud-Terrain Applications

- Angled biting edges promote efficient stone ejection, helping prevent stone retention and maintain consistent off-road traction
- The high strength construction and innovative tread formula improve tire robustness in the rugged terrain conditions
- Buttress design from extended shoulder and high strength cord ply protect sidewall from puncture on rugged surfaces

 Excellent Mud Clearance and Off-Road Capability

- Patented continuous groove design and optimized void-to-fill ratio ensure sufficient mud clearance capability for higher traction

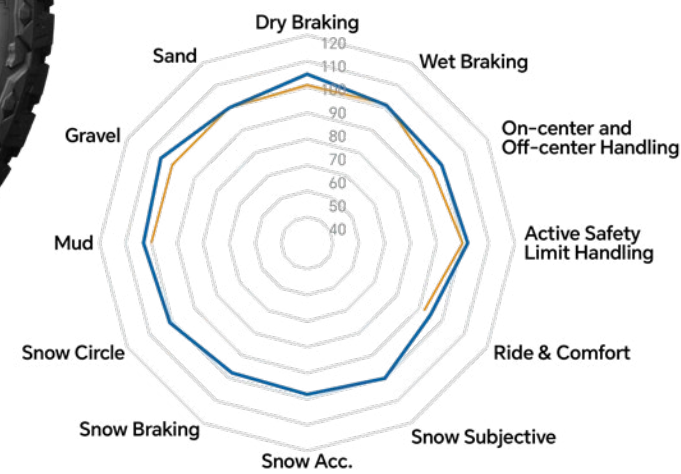

— H Brand
— ROTATOR M/T

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	LT215/75R15	6PR	100/97	Q	6J	D 730 S 800	D 1610 S 1765	350	50
	LT235/75R15	6PR	104/101	Q	61/2J	D 825 S 900	D 1820 S 1985	350	50
	30X9.50R15LT	6PR	104	Q	71/2J	900	1985	350	50
	31*10.50R15LT	6PR	109	Q	81/2J	1030	2270	350	50
	33*12.50R15LT	6PR	108	Q	10J	1000	2205	250	35
16	LT225/75R16	8PR	110/107	Q	6J	D 975 S 1060	D 2150 S 2335	450	65
	LT235/85R16 OWL	10PR	120/116	S	61/2J	D 1260 S 1380	D 2778 S 3042	550	80

Rim	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	LT245/75R16	10PR	120/116	Q	7J	D 1260 S 1380	D 2778 S 3042	550	80
	LT265/70R16	6PR	110/107	Q	8J	D 975 S 1060	D 2150 S 2335	350	50
	LT265/75R16	10PR	123/120	Q	7 1/2J	D 1400 S 1550	D 3085 S 3415	550	80
	LT285/75R16	10PR	126/123	Q	8J	D 1550 S 1700	D 3415 S 3750	550	80
	LT305/70R16	10PR	124/121	Q	9J	D 1450 S 1600	D 3195 S 3525	450	65
	LT315/75R16	10PR	127/124	Q	8 1/2J	D 1600 S 1750	D 3525 S 3860	450	65
17	LT235/80R17	10PR	120/117	Q	6 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT265/70R17	10PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT285/70R17	10PR	121/118	Q	8 1/2J	D 1320 S 1450	D 2910 S 3195	550	80
	LT305/70R17	8PR	119/116	Q	9J	D 1250 S 1360	D 2755 S 3000	350	50
	33X12.50R17LT	10PR	120	Q	10J	1400	3085	450	65
	35X12.50R17LT	10PR	121	Q	10J	1450	3195	450	65
	37X13.50R17LT	10PR	121	Q	10J	1450	3195	450	65
18	LT275/70R18	10PR	125/122	Q	8J	D 1500 S 1650	D 3305 S 3640	550	80
	33X12.50R18LT	10PR	118	Q	10J	1320	2910	450	65
	33X12.50R18LT	12PR	122	Q	10J	1500	3305	550	80
	35X12.50R18LT	10PR	123	Q	10J	1550	3415	450	65
20	LT275/55R20	10PR	120/117	Q	81/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT285/55R20	10PR	122/119	Q	9J	D 1360 S 1500	D 3000 S 3305	550	80
	LT285/65R20	10PR	127/124	Q	81/2J	D 1600 S 1750	D 3525 S 3860	550	80
	LT305/55R20	10PR	121/118	Q	91/2J	D 1320 S 1450	D 2910 S 3195	450	65
	33X12.50R20LT	10PR	114	Q	10J	1180	2600	450	65
	33X12.50R20LT	12PR	119	Q	10J	1360	3000	550	80
	35X12.50R20LT	10PR	121	Q	10J	1450	3195	450	65
	35X12.50R20LT	12PR	125	Q	10J	1650	3640	550	80
	37X13.50R20LT	10PR	127	Q	11J	1750	3860	450	65
	37X13.50R20LT	12PR	128	Q	11J	1800	3970	550	80
	33X12.50R22LT	10PR	109	Q	10J	1030	2270	450	65
22	33X12.50R22LT	12PR	114	Q	10J	1180	2600	550	80
	35X12.50R22LT	10PR	117	Q	10J	1285	2835	450	65
	35X12.50R22LT	12PR	121	Q	10J	1450	3195	550	80
	37X13.50R22LT	10PR	123	Q	11J	1550	3415	450	65
	37X13.50R22LT	12PR	128	Q	11J	1800	3970	550	80
24	37X13.50R24LT	10PR	120	Q	11J	1400	3085	450	65
	37X13.50R24LT	12PR	124	Q	11J	1600	3525	550	80
26	37X13.50R26LT	10PR	114	Q	11J	1180	2600	450	65

Replacement Market Tires Warranty Manual

Warranty Eligibility

This Limited Warranty applies to all qualified replacement-market passenger and light truck tires manufactured by Shandong Linglong Tyre Co., Ltd. and its subsidiaries. This Limited Warranty applies only to the original purchaser and only to tires bearing a complete brand identification and a valid DOT code or barcode. This Limited Warranty is valid only if all of the following conditions are met:

- The tires were manufactured on or after January 1, 2025, and were shipped to North America for sale and use.
- The tire fails due to the workmanship or materials.
- The tire is within the applicable warranty period, and the remaining tread depth is above the Tread Wear Indicator (TWI).

What Is Warranted and for How Long

If a tire covered by this Limited Warranty becomes unserviceable due to a defect in workmanship or materials while the remaining tread depth is above the Tread Wear Indicator (TWI), Linglong will provide warranty coverage in accordance with the terms and conditions of this Limited Warranty.

- The warranty period is six (6) years from the date of purchase or seven (7) years from the date of manufacture, whichever comes first, provided the remaining tread depth is above the Tread Wear Indicator (TWI).
- If a tire fails due to manufacturing defects and meets the warranty terms and conditions, with remaining tread depth above the TWI, a new tire of the same specification will be provided free of charge.

What Is Not Covered

1. Road hazard damage caused by obstacles or debris, including cuts, punctures (whether repairable or not), snags, bruises, tears, abrasions, or impact breaks.
2. Improper or failed repairs.
3. Damage resulting from improper inflation or improper maintenance.
4. Damage caused by improper mounting or dismounting.
5. Mechanical irregularities such as bent wheel assemblies, misalignment worn or faulty components.
6. Damage caused by overinflation, underinflation, overloading, or defective vehicle mechanical conditions.
7. Damage from over-inflation or under-inflation, overloading, defective vehicle mechanical conditions.
8. Non-racing or off-road tires that have been misused or abused in racing or off-road applications.
9. Damage caused by ozone or weather cracking, misuse, abuse, tire modifications, or operation while flat (run-flat damage).
10. Any tire from which the DOT identification number and/or brand name has been intentionally removed.
11. Tires that have been modified after leaving the factory, including the addition of fillers, sealants, balancing compounds, or external tire treatments. If any added material is determined to have caused the failure, the tire will not be eligible for warranty coverage.
12. Abnormal tread wear resulting from improper installation, wheel misalignment, tire/wheel assembly imbalance, etc.
13. Vehicles or tires operated beyond their rated load capacity.
14. Additional monetary loss, such as damage of the vehicle or time, etc.

Road Hazard Warranty

If a tire becomes unserviceable due to a non-repairable road hazard, it must meet the following eligibility requirements:

- The tire must be within one (1) year of the date of purchase. The original proof of purchase must be provided.
- For eligible tires, compensation will be equal to 50% of the total FOB tire price plus freight.

Treadwear Mileage Warranty

If an eligible tire wears evenly to the Tread Wear Indicator (TWI) before reaching the warranted mileage, under normal passenger vehicle use and within the applicable Limited Warranty period. The unused service will be subsidized on a pro-rata basis to purchase a new tire. To submit a claim, installation record, tire rotation record, tire rotation records, and tire removal record must be provided with the claimed tire.

- Tires must be rotated every 6,000 to 8,000 miles (10,000 to 13,000 km), or sooner.
- This warranty does not apply to original equipment (OE) tires.
- The Treadwear Mileage Warranty applies only to the original purchaser and owner of the tires.
- This Mileage Warranty does not apply to tires used in commercial applications, including but not limited to law enforcement vehicles, taxi services, courier services, delivery fleets, or other commercial uses.
- To qualify for this warranty, tires must show even tread wear, with no more than a 2/32" difference in tread depth across the tire tread.

Mileage Warranty Product List

Product Line	Mileage Warranty
CAPRICORN HP	60,000 miles (100,000km)
CAPRICORN UHP	50,000 miles (80,000km)
CAPRICORN 4X4 HP	60,000 miles (100,000km)
ROTATOR H/T	65,000 miles (110,000km)
ROTATOR A/T	65,000 miles (110,000km)
ROTATOR R/T	50,000 miles (80,000km)
SAGITTA X/T	55,000 miles (90,000km)

90-DAY Customer Satisfaction Trial

LingLong offers a 90 Day Free Trial as the following :

- Applies to passenger tires only (Excludes commercial, light truck (LT), racing, and other specialty tires).
- This Satisfaction Guarantee applies only to the original purchaser who purchases at least four (4) new passenger tires in a single transaction. It does not apply to replacement tires provided under this guarantee.
- This guarantee does not apply to tires that have been intentionally damaged or damaged due to misuse, abuse, or improper use.
- How do you return your tires during the trial period?
A.Within the applicable trial period from the date of purchase, you must return your tires to the tire dealer where you purchased your tires.
B.Present the original sales receipt or other proof of purchase.
C.Provide the reason for your dissatisfaction (such as appearance, ride comfort, or handling, etc.).

To Make a Claim Under This Limited Warranty

- Present your tires and the original proof of purchase to the original place of purchase or any authorized Company dealer.
- Complete and sign the Warranty Claim Adjustment Form, keep a copy for your records, and leave the tire with the dealer for warranty claim processing;

Owner’s Responsibilities

- At the time of purchase, tires must be properly installed with recommended inflation and balanced. Observe rotation and alignment regularly according to recommendations.
- To submit a warranty claim, contact the original place of purchase or any authorized Company dealer.
- The owner is responsible for all service charges and applicable taxes.
- A copy of the original proof of purchase must be submitted to support the warranty claim.

Tire Safety and Maintenance

Tire failure can result in serious property damage and/or personal injury. To help reduce these risks, we recommend the following safety practices:

1. Maintain proper tire inflation pressure. Do not underinflate or overinflate your tires. Always maintain inflation pressure according to the vehicle manufacturer’s recommendations or the tire manufacturer’s specifications.
2. Check wheel alignment and tire balance regularly to help ensure proper handling, performance, and even tread wear.
3. Do not overload your vehicle. Refer to the tire sidewall markings for the tire’s maximum load-carrying capacity.
4. Avoid excessive tire spinning & impacts with curbs, potholes, obstacles, pavement edges.
5. Never drive on worn-out (bald) tires. By law, tires must be replaced when the tread reaches the Tread Wear Indicator (TWI).
6. Inspect your tires regularly for signs of damage, including cuts, abrasions, punctures, foreign objects, separations, or bulges. If damage is found, replace the tire with the spare tire (if available) and consult an authorized tire dealer.
7. Do not exceed posted speed limits or the maximum speed rating specified for the tire.
8. To promote even wear and maximize tread life, rotate your tires at least every 6,000 miles (10,000 km) or according to the vehicle manufacturer’s recommendations.

Exclusions, Limitations, and Legal Rights

No representative, dealer, or distributor is authorized to make any representation, promise, or agreement on behalf of Linglong, except as expressly stated in this warranty document. Any tire, regardless of construction quality, may fail in service or otherwise become unserviceable due to conditions beyond the manufacturer's control. This warranty does not constitute a representation that tire failure will not occur under any circumstances.

DISCLAIMER:This warranty is provided in lieu of all other warranties and representations, express or implied. Linglong expressly disclaims all implied warranties, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. No other warranty, guarantee, or representation of any kind shall be deemed to exist or arise by operation of law.

LIMITATION OF DAMAGES: Under no circumstances shall Linglong be liable for any indirect, special, incidental, consequential, or punitive damages, including but not limited to loss of profits, business interruption, loss of reputation or goodwill, or costs related to replacement transportation or other related expenses. Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages; therefore, certain portions of this limitation may not apply in specific jurisdictions.

This warranty establishes specific legal rights and obligations. Additional rights may apply depending on the applicable state or provincial laws.

EVOLUXX

Evolve Without Limits

CONTACT

Web Site:

na.evoluxxtire.com



Catalog



Web



@evoluxxtire



@evoluxx_tire